



ULTIMATE PROTECTION

All HI-TORQUE and MULTI-TORQUE hose clips have fully rounded edges to give the best possible protection to the hose.



JCS band edges



Typical hose clip with turned edges



MULTI-TORQUE


Ideal for large diameter applications, our Multi-Torque adjustable banding hose clamps combine the strength and performance of the Hi-Torque hose clamp with the versatility and convenience of producing instant hose clamps to any design and diameter from a kit. Available in both 304 and 316 stainless steel.

Multi-Torque is significantly stronger than any other adjustable banding products and straightforward to use - simply cut off the required banding length from a continuous roll and engage one end into each housing of the worm drive Multi-Torque connectors provided. The band can then be applied to pipes or ducts of virtually any diameter.

Multi-Torque banding is supplied in 10m and 30m coils. Other lengths are available to special order. A maintenance kit is also available that contains one connector and 1m coil, a necessary addition to any field service engineer's toolkit.

FOR MORE DETAILS CALL US NOW ON **+44 (0) 1787 888031** OR EMAIL **INFO@JCSHI-TORQUE.CO.UK**

MULTI-TORQUE TECHNICAL & MATERIAL SPECIFICATION

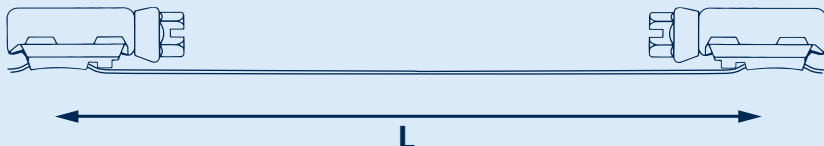

RECOMMENDED SETTING TORQUE
15Nm (130 lb.tn)

BAND TENSILE STRENGTH
1150 N/mm² approx. (75 tons/in²)

MATERIAL SPECIFICATIONS

STAINLESS STEEL 304

All parts BS304 - EN 1.4301/1.4576

STAINLESS STEEL 316

All parts BS316 - EN 1.4401/1.4578

MULTI-TORQUE CONNECTORS

| Length | Box Qty |
|--------|---------|
| 150mm | 10 |
| 300mm | 25 |
| 350mm | 25 |
| 450mm | 25 |

MULTI-TORQUE BANDING

Length

| |
|-----|
| 10m |
| 30m |

