


Captive pin twisted shackle - Dia 6 mm

Part #1423

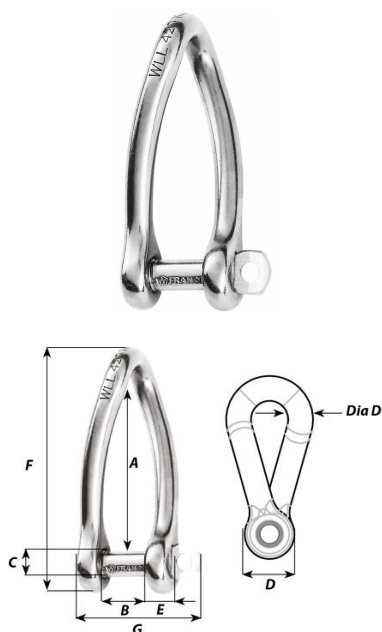

Description

Captive pin twisted shackle forged in grade 316L stainless steel

The pin is connected to the body at all times even when opened

The pin is locked into one of the indentations

No risks of loose due to vibrations

Outstanding working and breaking loads

le manillon ne peut se perdre

Single handed operation for more safety

WLL: only for industrial applications (lifting i.e...)

CE marking and batch number

Applications

Perfect for application where a 90° angle twist setup is required

Often used to attach an unarticulated part (block on a rail) or on purchases

Technical information

	Materials	316 stainless steel grade
	Working load (kg)	600
	WLL (kg)	440
	Breaking load (kg)	2100
	Weight (g)	39
	A (mm)	44
	B (mm)	12
	C (mm)	7
	D (mm)	14
	D diameter (mm)	6
	E (mm)	6
	F (mm)	60
	G (mm)	31

Caption



Working load (WL) : for nautical applications



Working Load Limit (WLL): for industrial applications only.

The safety factor is 5 times the breaking load.

$WLL = \text{Breaking load} / 5$

Wichard s'efforce d'assurer au mieux de ses possibilités, l'exactitude et la mise à jour des informations diffusées sur ce document, dont il se réserve le droit de corriger à tout moment et sans préavis le contenu, ainsi que de faire évoluer ses produits.

Dans le cas d'une application industrielle, merci de prendre contact avec notre service commercial et technique afin de valider l'utilisation de ces produits. La demande de certificats peut être faite directement auprès du service commercial.

Photos non contractuelles.