


Captive pin bow shackle - Dia 10 mm

Part #1445

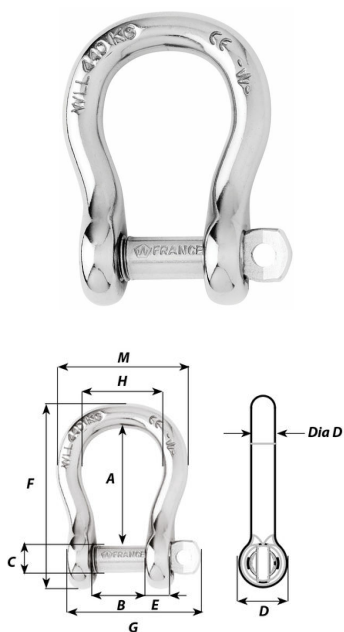

Description

Captive pin bow shackle forged in grade 316L stainless steel
The pin is connected to the body at all times even when opened
The pin is locked into one of the indentations
No risks of loose due to vibrations
Outstanding working and breaking loads
Single handed operation for more safety
WLL: only for industrial applications (lifting i.e...)
CE marking and batch number

Applications

To be used when ample room is required
Possibility to attach several lines or cables

Technical information

	Materials	316 stainless steel grade
	Working load (kg)	1520
	WLL (kg)	1040
	Breaking load (kg)	5200
	Weight (g)	139
	A (mm)	46
	B (mm)	20
	C (mm)	11
	D (mm)	21
	D diameter (mm)	10
	E (mm)	9
	M (mm)	52

Caption

-  Working load (WL) : for nautical applications
-  Working Load Limit (WLL): for industrial applications only.
The safety factor is 5 times the breaking load.
 $WLL = \text{Breaking load} / 5$

Wichard s'efforce d'assurer au mieux de ses possibilités, l'exactitude et la mise à jour des informations diffusées sur ce document, dont il se réserve le droit de corriger à tout moment et sans préavis le contenu, ainsi que de faire évoluer ses produits.

Dans le cas d'une application industrielle, merci de prendre contact avec notre service commercial et technique afin de valider l'utilisation de ces produits. La demande de certificats peut être faite directement auprès du service commercial.

Photos non contractuelles.