


## Watertight U-bolt - Dia 12 mm - Length: 130 mm - Black

Part #65461

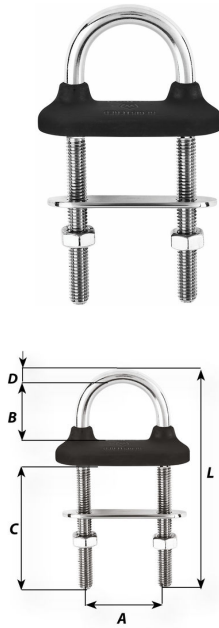


### Description

Fully dropforged product with high quality stainless steel  
Outstanding working and breaking loads  
Complete watertightness thanks to the resistant rubber collar (black colour)  
Easy installation (no need to use a waterproof sealant)  
For any kind of fastening applications (shrouds, lifeline, blocks...)  
Delivered with bolts and counterplate  
Max tightening torque: 60 Nm

### Applications

Various fastening applications: shrouds, lifelines, blocks...

## Technical information

Materials	316L stainless steel grade
Colour	Black
Length (mm)	130
 Working load (kg)	6400
Breaking load (kg)	10000
Weight (g)	375
A (mm)	44
B (mm)	27
C (mm)	70
D diameter (mm)	12

### Caption



Working load (WL) : for nautical applications



Working Load Limit (WLL): for industrial applications only.  
The safety factor is 5 times the breaking load.  
 $WLL = \text{Breaking load} / 5$

Wichard s'efforce d'assurer au mieux de ses possibilités, l'exactitude et la mise à jour des informations diffusées sur ce document, dont il se réserve le droit de corriger à tout moment et sans préavis le contenu, ainsi que de faire évoluer ses produits.

Dans le cas d'une application industrielle, merci de prendre contact avec notre service commercial et technique afin de valider l'utilisation de ces produits. La demande de certificats peut être faite directement auprès du service commercial.

Photos non contractuelles.