


Folding pad eye - Dia 10 mm

Part #6606

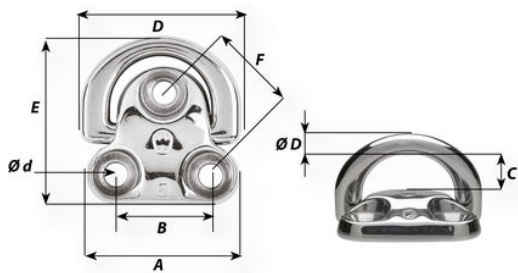

Description

Perfect solution for fastening applications (stay, blocks, jib tack point, lifeline, tether etc...)

Fully dropforged product with outstanding working and breaking loads regardless the angle of the load

Modern and optimized design to suit aesthetics of modern boats

They can be fold down to minimize the risk of injuries

The silicon pad eliminates noise and unpleasant vibrations

Modern design

Applications

For any fastening/attachment application: shroud, stay, blocks, lifeline, jib tack point etc...)

Technical information

Materials 17.4 pH stainless steel
316L stainless steel grade



Working load (kg)	4080
Breaking load (kg)	9000
Weight (g)	355
A (mm)	75
B (mm)	45
C (mm)	25
D (mm)	80
d diameter (mm)	10
D diameter (mm)	10
E (mm)	68
F (mm)	45

Caption



Working load (WL) : for nautical applications



Working Load Limit (WLL): for industrial applications only.

The safety factor is 5 times the breaking load.

WLL = Breaking load / 5

Wichard s'efforce d'assurer au mieux de ses possibilités, l'exactitude et la mise à jour des informations diffusées sur ce document, dont il se réserve le droit de corriger à tout moment et sans préavis le contenu, ainsi que de faire évoluer ses produits.

Dans le cas d'une application industrielle, merci de prendre contact avec notre service commercial et technique afin de valider l'utilisation de ces produits. La demande de certificats peut être faite directement auprès du service commercial.

Photos non contractuelles.