






## CORDPLAST®


### NEMOCORD NO TWIST

				
mm	mm	gr/mt	bar	bar
10	2,5	110	10	30
13	2,8	170	10	32
16	2,8	200	10	32
19	3,0	260	10	32
22	3,0	300	10	21
25	3,5	420	10	32
30	4,0	529	5	15

TEMPERATURE, TEMPERATUR, TEMPERATURA, TEMPERATURE: -5°C / +60°C  
+23°F / +140°F

NORMS, NORMEN. NORMAS, NORMES EEC DIRECTIVE: ISO 1307

LENGHT/LANGE/LONGITUD/LONGUEUR: mt 25 or mt 50

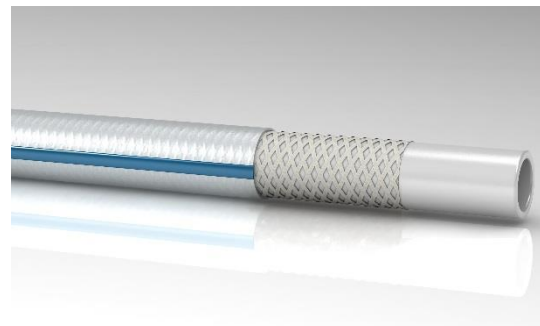

**Tube:** White transparent plasticized pvc.  
**Reinforcement:** high tensile synthetic textile.  
**Cover:** White transparent cover with white substrate.  
**Application:** gardening, irrigation and general water discharge.



**Seele:** Transparent plastifizter pvc  
**Einlagen:** hochfestes synthetisches textiltgewebe.  
**Decke:** Transparente decke mit weissem beschichtungsuntergrund.  
**Anwendung:** geeignet als bewässerungsslauch, für garten, landwirtschaft und baustellen.



**Sustrato:** Pvc plastificado blanco transparente  
**Refuerzo:** Color cobertura blanca transparente con sustrato blanco.  
**Uso:** jardinería, floricultura, para el sector de la construcción e industria



**Tube:** Tuyau lisse en pvc blanc transparent.  
**Reinforcement:** insertion textile haute tenacité.  
**Revetement:** Revêtement blanc transparent, tube blanc.  
**Application:** pour refoulement d'eau, arrosage, nettoyage, irrigation

#### SATI GROUP S.P.A.

Via C. Bonazzi, 24 - 40013 CASTEL MAGGIORE (BO) - ITALY

Tel. +39.051.700321 - Fax +39.051.701350

E-mail: [export@satigroup.it](mailto:export@satigroup.it)

web: [www.satigroup.it](http://www.satigroup.it)